



◎ 内部结构


单电控电磁阀



双电控电磁阀

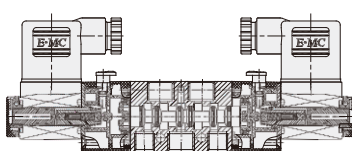

三位置电磁阀


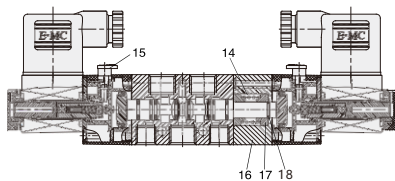


序号	零件名称	材 质
1	接线盒	工程塑料
2	固定螺帽	POM
3	线圈	铜+热固性树脂
4	先导头组件	纯铁+铜+不锈钢
5	压板	碳钢
6	活塞	POM
7	先导座	工程塑料
8	阀体	铝合金
9	阀杆	铝合金
10	O令	NBR
11	后盖	工程塑料
12	滤芯	高分子材料
13	活塞	工程塑料
14	弹簧	不锈钢
15	手动杆	工程塑料
16	回归座	铝合金
17	弹簧座	铝合金
18	C型扣环	65Mn


◎ 外形尺寸图

单电控电磁阀

接线盒式

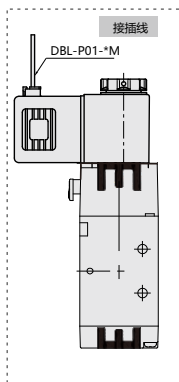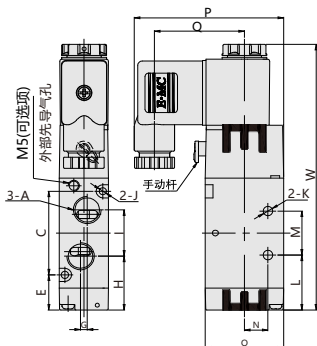

引出线式

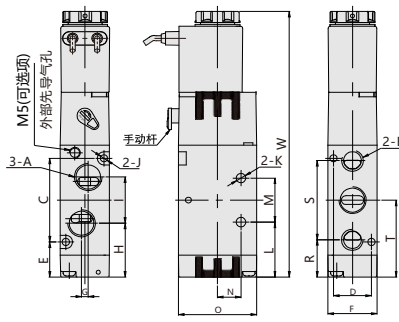


单位(mm)

型号\符号	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	W
RV5211-M5	M5	M5	30	13	16.5	18	0	24.5	14.1	3.3	3.3	24.5	14	9.5	27	55.2	33.9	17.9	27.2	31.5	103.1
RV5211-06	G1/8	G1/8	30	13	16.5	18	3	23.5	16	3.3	3.3	24.5	14	9.5	27	55.2	33.9	17.5	28	31.5	103.1
RV5221-06	G1/8	G1/8	38	17	16	22	0	26	18	3.3	4.3	25	20	10.5	35	66.7	40.2	17	36	35	120.7
RV5221-08	G1/4	G1/8	38	17	16	22	3	24.5	21	3.3	4.3	25	20	10.5	35	66.7	40.2	17	36	35	120.7
RV5231-08	G1/4	G1/4	50	20	19.1	27	0	33.1	22	4.3	4.3	32.1	24	13.5	40	69.2	40.2	21.6	45	44.1	139.3
RV5231-10	G3/8	G1/4	50	20	19.1	27	4	32.1	24	4.3	4.3	32.1	24	13.5	40	69.2	40.2	21.6	45	44.1	139.3
RV5241-10	G3/8	G3/8	72	27	21	34	0	39	36	4.3	5.5	43	28	17.5	50	74.2	40.2	25.5	63	57	168.7
RV5241-15	G1/2	G1/2	72	27	21	34	4	39	36	4.3	5.5	43	28	17.5	50	74.2	40.2	25.5	63	57	168.7


注：RV系列低功率电磁阀与之尺寸相同

双电控电磁阀

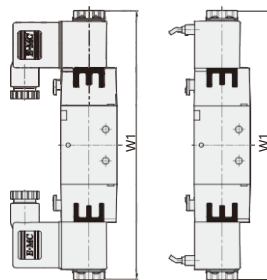


接线盒式

三位置电磁阀

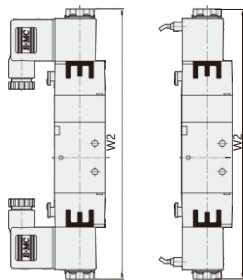

接线盒式



引出线式

型号\符号	W1	型号\符号	W2
RV5212-M5	143.2	RV5312-M5	158.2
RV5212-06	143.2	RV5312-06	158.2
RV5222-06	171.4	RV5322-06	190.4
RV5222-08	171.4	RV5322-08	190.4
RV5232-08	190.4	RV5332-08	209.4
RV5232-10	190.4	RV5332-10	209.4
RV5242-10	223.4	RV5342-10	244.4
RV5242-15	223.4	RV5342-15	244.4

注：RV系列低功率电磁阀与之尺寸相同